

12000-L-PBT

122xx-L-PBT – 2 Port Taps

124xx-L-PBT – 4 Port Taps

128xx-L-PBT – 8 Port Taps

1.2 GHz Full-Feature Equalizable Taps

FEATURES

- Support DOCSIS® 3.1 expanded bandwidth up to 1218 MHz
- Improve network performance with signal conditioning plug-ins
- Maintain existing installed base with housing compatibility back to 9000-L series tap housings
- High level of network resilience with 6kV surge resistance on feeder and 4kV surge resistance on tap ports
- Integrated bypass capability maintains RF and AC connections with faceplate removed



PRODUCT OVERVIEW

The ARRIS 12000-L-PBT 1.2 GHz series equalizable taps offer improved return path performance for advanced two-way HFC systems, while maintaining backwards compatibility with previous legacy Philips/C-COR installed base of taps using the deep body 9000-L series tap housing. The 12000-L-PBT tap series also allows for a direct drop in solution without the need to reconfigure the plant due to minimal loss changes to the current 1 GHz performance. As an added new feature in the new 1.2 GHz series of 12000-L-PBT taps now allow for signal conditioning with optional plug-in, field configurable modules that include cable equalizers, return path attenuators, and cable simulators. These plug-ins allow for drop signal conditioning without affecting the main feederline path.

12000-L-PBT Series Taps 5-1218 MHz

12000-L-PBT INSERTION LOSS SPECIFICATIONS¹ (5-1218 MHz)

Insertion Loss (dB)	Nom. Tap Value	5 MHz Typ/Max	10 MHz Typ/Max	50 MHz Typ/Max	100 MHz Typ/Max	450 MHz Typ/Max	550 MHz Typ/Max	750 MHz Typ/Max	870 MHz Typ/Max	1000 MHz Typ/Max	1218 MHz Typ/Max
MODEL NO. 122xx-L-PBT											
12204-L-PBT	4.0	—	—	—	—	—	—	—	—	—	—
12208-L-PBT	8.0	2.8/3.9	2.5/3.6	2.5/3.5	2.5/3.6	3.2/4.2	3.3/4.2	3.6/4.2	3.8/4.3	4.0/4.3	4.9/5.2
12212-L-PBT	12.0	1.6/2.0	1.2/1.8	1.1/1.8	1.1/2.0	1.5/2.4	1.6/2.4	2.0/2.6	2.3/2.8	2.6/3.0	3.3/3.7
12214-L-PBT	14.0	1.1/1.3	0.9/1.2	0.8/1.2	0.9/1.3	1.1/1.6	1.1/1.8	1.3/1.8	1.5/2.0	1.8/2.3	2.2/2.8
12217-L-PBT	17.0	0.8/1.2	0.7/1.1	0.6/1.1	0.7/1.2	0.9/1.5	1.0/1.5	1.1/1.5	1.3/1.6	1.5/1.8	2.0/2.2
12220-L-PBT	20.0	0.6/1.0	0.5/0.9	0.4/0.9	0.5/1.0	0.8/1.3	0.9/1.4	1.0/1.5	1.2/1.6	1.4/1.6	1.9/2.1
12223-L-PBT	23.0	0.4/0.7	0.3/0.6	0.3/0.7	0.3/0.8	0.6/1.1	0.7/1.2	0.8/1.3	1.0/1.4	1.3/1.6	1.8/2.1
12226-L-PBT	26.0	0.4/0.7	0.3/0.6	0.3/0.7	0.3/0.8	0.6/1.1	0.7/1.2	0.9/1.3	1.1/1.4	1.3/1.6	1.9/2.1
12229-L-PBT	29.0	0.4/0.8	0.3/0.6	0.3/0.7	0.3/0.8	0.6/1.1	0.7/1.2	0.9/1.3	1.1/1.4	1.4/1.6	2.0/2.1

Insertion Loss (dB)	Nom. Tap Value	5 MHz Typ/Max	10 MHz Typ/Max	50 MHz Typ/Max	100 MHz Typ/Max	450 MHz Typ/Max	550 MHz Typ/Max	750 MHz Typ/Max	870 MHz Typ/Max	1000 MHz Typ/Max	1218 MHz Typ/Max
MODEL NO. 124xx-L-PBT											
12408-L-PBT	8.0	—	—	—	—	—	—	—	—	—	—
12412-L-PBT	12.0	2.6/3.9	2.5/3.6	2.4/3.5	2.5/3.6	3.1/4.3	3.3/4.4	3.5/4.4	3.8/4.7	4.2/5.0	5.1/5.4
12415-L-PBT	15.0	1.8/2.0	1.4/1.8	1.3/1.8	1.3/2.0	1.6/2.4	1.7/2.6	2.02/2.8	2.2/3.0	2.4/3.1	3.0/3.7
12417-L-PBT	17.0	1.1/1.3	0.8/1.2	0.8/1.2	0.8/1.3	1.1/1.7	1.2/1.9	1.4/1.9	1.6/2.1	1.8/2.4	2.4/2.8
12420-L-PBT	20.0	0.9/1.2	0.7/1.1	0.6/1.1	0.6/1.2	0.9/1.5	0.9/1.5	1.0/1.6	1.2/1.8	1.4/2.0	1.7/2.3
12423-L-PBT	23.0	0.6/1.0	0.5/0.9	0.4/0.9	0.5/1.0	0.7/1.3	0.8/1.4	1.0/1.5	1.2/1.6	1.4/1.7	1.8/2.1
12426-L-PBT	26.0	0.4/0.7	0.3/0.6	0.3/0.7	0.3/0.8	0.6/1.1	0.6/1.2	0.8/1.3	1.0/1.4	1.1/1.5	1.5/2.0
12429-L-PBT	29.0	0.4/0.8	0.3/0.7	0.3/0.7	0.3/0.8	0.6/1.1	0.7/1.2	0.9/1.3	1.0/1.4	1.3/1.5	2.0/2.0

Insertion Loss (dB)	Nom. Tap Value	5 MHz Typ/Max	10 MHz Typ/Max	50 MHz Typ/Max	100 MHz Typ/Max	450 MHz Typ/Max	550 MHz Typ/Max	750 MHz Typ/Max	870 MHz Typ/Max	1000 MHz Typ/Max	1218 MHz Typ/Max
MODEL NO. 128xx-L-PBT											
12812-L-PBT	12.0	—	—	—	—	—	—	—	—	—	—
12815-L-PBT	15.0	2.6/3.9	2.4/3.6	2.4/3.5	2.4/3.6	3.0/4.4	3.3/4.5	3.5/4.5	3.8/4.7	4.0/5.0	5.0/5.4
12818-L-PBT	18.0	1.7/2.0	1.5/1.8	1.3/1.8	1.3/2.0	1.6/2.6	1.8/2.8	2.0/2.8	2.32/2.9	2.5/3.1	3.2/3.6
12821-L-PBT	21.0	1.1/1.3	0.8/1.2	0.8/1.2	0.8/1.3	1.0/1.9	1.4/1.9	1.3/1.9	1.6/2.1	1.87/2.3	2.4/2.8
12824-L-PBT	24.0	0.8/1.1	0.5/0.9	0.5/0.9	0.5/1.1	0.8/1.5	0.9/1.6	1.0/1.6	1.2/1.8	1.4/2.0	1.9/2.2
12827-L-PBT	27.0	0.6/0.9	0.5/0.7	0.4/0.7	0.5/1.1	0.7/1.4	0.8/1.4	1.0/1.4	1.2/1.4	1.4/1.6	1.9/2.0

NOTE:

1. The 12xxx-L-PBT is shipped standard with a jumper (T-JP) installed into the plug-in module sockets.

12000-L-PBT Series Taps 5-1218 MHz

12000-L-PBT SPECIFICATIONS TAP TO OUTPUT ISOLATION, (dB) NOMINAL

MODEL NO. 122xx-L-PBT	5-9 MHz	9-85 MHz	85-750 MHz	750-1000 MHz	1000-1218 MHz
12204-L-PBT	—	—	—	—	—
12208-L-PBT	20	25	22	20	20
12212-L-PBT	20	25	24	22	20
12214-L-PBT	20	25	26	25	22
12217-L-PBT	20	25	28	27	24
12220-L-PBT	20	28	33	31	26
12223-L-PBT	20	30	35	33	28
12226-L-PBT	20	33	37	35	30
12229-L-PBT	20	34	40	38	30

MODEL NO. 124xx-L-PBT	5-9 MHz	9-85 MHz	85-750 MHz	750-1000 MHz	1000-1218 MHz
12408-L-PBT	—	—	—	—	—
12412-L-PBT	20	25	24	22	20
12415-L-PBT	20	25	27	25	22
12417-L-PBT	20	25	30	28	24
12420-L-PBT	20	25	33	31	26
12423-L-PBT	20	29	36	34	30
12426-L-PBT	20	32	38	36	32
12429-L-PBT	20	32	40	38	34

MODEL NO. 128xx-L-PBT	5-9 MHz	9-85 MHz	85-750 MHz	750-1000 MHz	1000-1218 MHz
12812-L-PBT	—	—	—	—	—
12815-L-PBT	20	25	27	25	22
12818-L-PBT	20	25	30	28	24
12821-L-PBT	20	25	32	30	26
12824-L-PBT	20	29	34	33	30
12827-L-PBT	20	32	38	34	30

12000-L-PBT Series Taps 5-1218 MHz

GENERAL SPECIFICATIONS

Power Passing	12 Amperes Maximum (60/90 volts)
Surge: In/Out F-Port	6 kV Combination Wave 4 kV Combination Wave
Hum Modulation (10 Amperes)	
5 – 10 MHz:	60 dB Minimum
10 – 750 MHz:	65 dB Minimum
750 – 1218 MHz:	60* dB Minimum
RFI	100 dB minimum
Operating Temperature	-40°C to +60°C


SPECIFICATIONS

Tap Value Tolerance	2-way	5 – 1000 MHz	± 2.0 dB
		1000 – 1218 MHz	± 2.5 dB
	4-way	5 – 1000 MHz	± 2.0 dB
		1000 – 1218 MHz	± 3.0 dB
	8-way	5 – 500 MHz	± 2.0 dB
		500 – 1000 MHz	± 3.0 dB
1000 – 1218 MHz		± 3.7 dB	
Tap to Tap Isolation		5 – 10 MHz	18 dB
		10 – 450 MHz	24 dB (122xx-L-PBT only) 25 dB
		450 – 750 MHz	23 dB
		750 – 1218 MHz	20 dB
Return Loss: Tap Ports		5 – 30 MHz	16 dB
		30 – 600 MHz	17 dB
		600 – 1000 MHz	16 dB
		1000 – 1218 MHz	16 dB
Return Loss: In/Out Ports		5 – 10 MHz	16 dB
		10 – 30 MHz	17 db
		30 – 600 MHz	18 dB
		600 – 1000 MHz	16 dB
		1000 – 1218 MHz	15 dB

Mechanical	SCTE IPS-SP-400 – F-port Interface/SCTE IPS-SP-420 – Entry Port Interface
Emission	47 CFR Part 15 FCC Radio Frequency Devices October 1, 2011, CISPR 22 Ed. 6.0 b:2008, EN 61000-3-2:2006 +A1/A2:2009 Electromagnetic Compatibility (EMC) Part 3-2, EN 61000-3-3:2013- Electromagnetic Compatibility (EMC) – Part 3-3, ICES Issue 6 - Information Technology Equipment (ITE), EN55022:2010/AC:2011
Safety	IEC 60950-22, Edition 2.0 2016-01
Dimensions	5.5 L x 4.0 H x 3.0 D (inches) (13.97 x 10.16 x 7.62 cm)
Weight	1.5 lb (0.69 kg)

* Hum performance can degrade 2 dB at 60°C.

12000-L-PBT Block Diagram

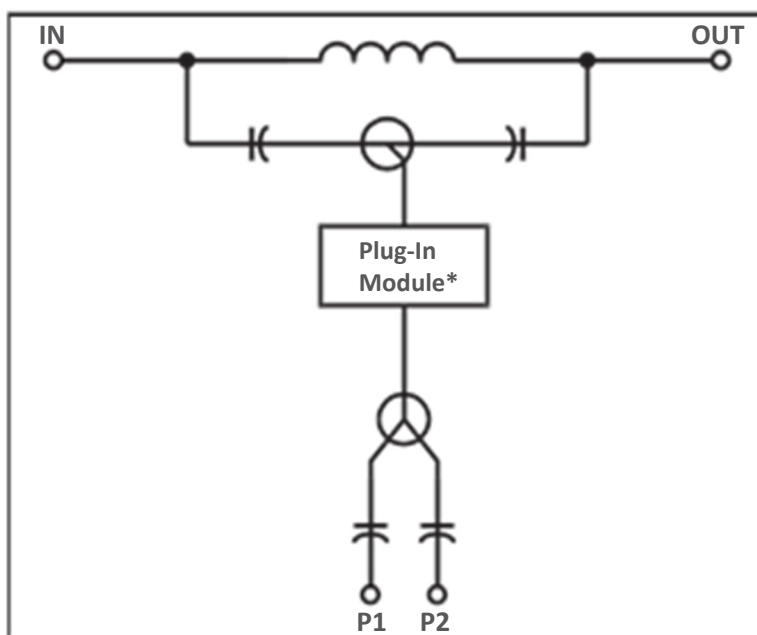

**Plug-In Module may be T-JP, T-EQ-*-Q, T-RPA/*-Q, or T-CS-*-Q. Block Diagram shown is for a 2-port tap. The 4-port and 8-port taps will have additional splitters after the plug-in module.*

12000-L-PBT Series Taps 5-1218 MHz

2-WAY ORDERING INFORMATION

Model Number	Part Number (Complete Tap)	Description
12204-L-PBT	1510422-001	4 dB Terminating Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12208-L-PBT	1510422-002	8 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12212-L-PBT	1510422-003	12 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12214-L-PBT	1510422-004	14 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12217-L-PBT	1510422-005	17 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12220-L-PBT	1510422-006	20 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12223-L-PBT	1510422-007	23 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12226-L-PBT	1510422-008	26 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12229-L-PBT	1510422-009	29 dB Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.

4-WAY ORDERING INFORMATION

Model Number	Part Number (Complete Tap)	Description
12408-L-PBT	1510423-001	8 dB Terminating Two-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12412-L-PBT	1510423-002	12 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12415-L-PBT	1510423-003	15 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12417-L-PBT	1510423-004	17 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12420-L-PBT	1510423-005	20 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12423-L-PBT	1510423-006	23 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12426-L-PBT	1510423-007	26 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12429-L-PBT	1510423-008	29 dB Four-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.

12000-L-PBT Series Taps 5-1218 MHz

8-WAY ORDERING INFORMATION

Model Number	Part Number (Complete Tap)	Part Number (Complete Tap)
12812-L-PBT	1510424-001	12 dB Terminating Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12815-L-PBT	1510424-002	15 dB Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12818-L-PBT	1510424-003	18 dB Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12821-L-PBT	1510424-004	21 dB Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12824-L-PBT	1510424-005	24 dB Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.
12827-L-PBT	1510424-006	27 dB Eight-port RF/AC bypass tap with equalization plug-in capability. Shipped with jumper installed.

RELATED PRODUCTS

12-TFC/LPI® Passives RF Amplifiers

T*-Q 1.2 GHz Tap Plug-ins Optical Nodes

Headend Optics

Note: Specifications are subject to change without notice.

Copyright Statement: ©ARRIS Enterprises, LLC, 2017. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.

1200-L-PBT_DS_16MAR17

(rev 03-2017)

Ask us about the complete Access Technologies Solutions portfolio:

Taps-12000-L-PBT

Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656