




## Fanout Kits

Fanout kits route 250  $\mu\text{m}$  fibers into 900  $\mu\text{m}$  buffer tubes ready for termination. These kits require no special tools and accommodate input cables from 2.0-3.8 mm in diameter. Fanout kits feature a clear, removable cover which is VFL-compatible and does not require epoxy. Color-coded 900  $\mu\text{m}$  buffer tubes allow for easy identification of individual fiber channels.

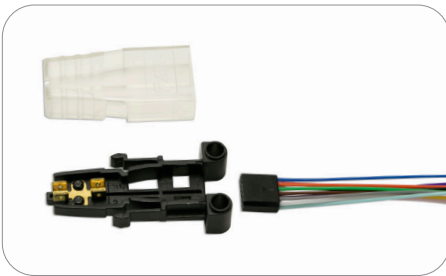

### Features

- Accepts 2.0-3.8 mm input cable
- Epoxy-free installation
- Clear, removable cover works with Visual Fault Locators (VFL)
- Protects sensitive 250  $\mu\text{m}$  fibers
- Compatible with FUSEConnect® and FASTConnect® field-installable connectors

### Applications

- Routing 250  $\mu\text{m}$  fibers into 900  $\mu\text{m}$  buffer tubes for termination

### Specifications

PARAMETER	VALUE
Fiber Count	12
Environment	Indoor
Input Cable Size	2.0 - 3.8 mm
Length	1 m

### Temperature Specifications

TEMPERATURE RANGE	
Operation	-0°C to 70°C

### Ordering Information

AFL NO.	DESCRIPTION
FAN1-9-012-A-01	Fanout kit, 1 position base, 900 $\mu\text{m}$ , 12 tubes, A, 1M