

IE-MiniMc/IE-Giga-MiniMc

Industrial Grade 10/100, Gigabit Switching Miniature Media Converters

The IE-MiniMc and IE-Giga-MiniMc Series are Industrial Equipment (IE) versions of the popular MiniMc Series, offering a range of transmission speeds, extended temperature, multiple powering options, DIN rail mounting.

Features and Benefits

The most cost-effective fiber converter available

- Low cost and feature rich
- Value add industrial grade extended temperature performance

Versatile Solution

- Standalone unit with small, rugged metal enclosure with compact, external power supply
- Available in 10/100 Mbps switching (IE-MiniMc), Gigabit Switching (IE-Giga-MiniMc) and protocol independent SFP versions
- Includes DIN clips for mounting (parallel or perpendicular) on DIN rail
- Available for a variety of fiber types and connectors, including single-strand fiber

More power options than other converters, for a variety of applications

- Includes country-specific AC power adapter
- Terminal DC power block with extended voltage range (7 to 50 VDC)
- Installs in the IE-PowerTray/18
- Power Over Ethernet (IEEE 802.3af standard) (10/100 versions only)
- Powering options can be combined for redundancy

Plug-and-Play Operation

- User-friendly Auto Negotiation technology
- Auto-Cross feature for twisted pair connection on all converters

High quality guaranteed

- Made in America with a comprehensive 6-year warranty (including power adapter)



Measuring less than 3.5 inches deep and 2 inches wide, the IE-MiniMc and IE-Giga-MiniMc Series converters are the industry's smallest copper-to-fiber media converters, with both data connections on the same side. The converters are a fraction of the cost of other industrial grade alternatives. The products provide the ease and convenience of plug-and-play operation (Auto Negotiation and Auto-Cross), and multiple power options, including the IEEE 802.3af Power Over Ethernet (PoE) (10/100 IE-MiniMc versions only), in an industrial grade configuration. The series features a variety of 10/100 and Gigabit versions.

All versions include:

- Extended operating temperature of up to -35 to 70° C
- Auto-Cross automatic selection between crossover and straight-through cable
- Status LEDs
- DIN clips, allowing installation on a DIN rail

IE-MiniMc includes:

- One 100 Mbps Full-Duplex fiber port
- One 10/100 Base-TX twisted-pair port that auto-senses the connected device's rate and duplex mode (Half-Duplex/Full-Duplex)
- Twisted pair port also functions as a Powered Device port, supporting Power Over Ethernet (PoE)


IE-Giga-MiniMc includes:

- One 1000Base-SX or 1000Base-LX fiber port operating at Full-Duplex.
- One 10/100/1000 Mbps twisted-pair port that auto-senses the connected device's speed and duplex mode (Half-Duplex/Full-Duplex)*

*At gigabit speeds, twisted-pair port operates at Full-Duplex only.

Application Example

The IE-MiniMc ships from the factory with DIN clips, allowing installation on a DIN rail. When installing multiple IE-MiniMc units on a DIN rail, power from the DC input source can be daisy-chained from one IE-MiniMc DC terminal to another.

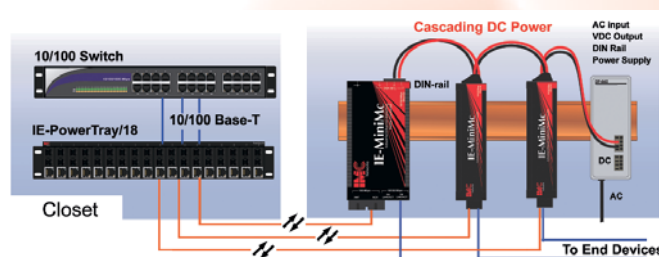

Technical Specifications

IE-MiniMc Only

- IEEE 802.3 10Base-T twisted pair
- IEEE 802.3u 100Base-TX twisted pair
- IEEE 802.3u 100Base-FX fiber
- IEEE 802.3af Power Over Ethernet

IE-Giga-MiniMc Only

- IEEE 802.3 10Base-T twisted pair
- IEEE 802.3u 100Base-TX twisted pair
- IEEE 802.3ab 1000Base-T twisted pair
- IEEE 802.3z 1000Base-LX or SX fiber

All Versions

- Support over-sized packets up to 1916 bytes
- Plug-and-play operation
- RJ-45 and ST or SC ports available (ST connectors not offered for Gigabit speeds)
- 50/125µm or 62.5/125µm multi-mode fiber
- 9/125µm single-mode fiber
- Available with single-strand fiber support
- Includes terminal DC power block
- Country-specific, high-reliability power adapter
- Auto Negotiation
- Auto-Cross for MDI-II/MDI-X
- Layer 2 packet switching, store and forward (forwarding rate: 14,880 pps for 10 Mbps, 148,000 pps for 100 Mbps, 1,480,000 Mbps for 1000 Mbps)
- Status LEDs
- DIN clips for DIN-35 rail

Regulatory Approvals:

- FCC Class B
- UL/cUL, CE

Dimensions:

0.83"H x 1.80"W x 3.35"D
(2.11 x 4.57 x 8.51 cm)

Humidity:

5% to 95% (non-condensing)

Power Rating:

7 - 50V DC, 1A-0.1A

Operating Temperature:

-31° to 158° F (-35° to +70° C)
using DC or PoE(PD) power
-4° to 158° F (-20° to +70° C)
without AC wall adapter
+32° to +122° F (0° to +50° C)
with AC wall adapter

Storage Temperature:

-49° to +185° F (-45° to +85° C)



IE-PowerTray/18

- 18 slots for powering MiniMc, MiniMc SFP, Giga-MiniMc, MiniMc-Gigabit, IE-MiniMc and IE-Giga-MiniMc fiber converters
- 1.5U high rack mountable enclosure

Regulatory Approvals:

- FCC Class A
- UL/cUL, CSA, CE

Dimensions

2.30"H x 16.97"W x 9.25"D
(5.80 x 43.10 x 23.5 cm)

Shipping Weight

10 lbs (4.5 kg)

Power Information

AC Input Load: 100-240V AC,
50/60Hz, 1.5A

Operating Temperature

32° to 122°F (0° to +50°C)
5% to 95% (non-condensing),
0 - 10,000 ft. altitude

Storage Temperature

-40° to +185°F (-40° to +85°C)
5% to 95% (non-condensing)

Fiber Optics Specifications

For each product listed below in the Ordering Information section, DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

PART NUMBER	DESCRIPTION	DISTANCE
IE-MiniMc 10/100 *		
855-19720 ¹	IE-MiniMc, TP-TX/FX-MM850-ST	2 km
855-19721 ¹	IE-MiniMc, TP-TX/FX-MM850-SC	2 km
855-19722	IE-MiniMc, TP-TX/FX-MM1300-ST	2 km
855-19723	IE-MiniMc, TP-TX/FX-MM1300-SC	2 km
855-19724	IE-MiniMc, TP-TX/FX-SM1310/PLUS-ST	30 km
855-19725	IE-MiniMc, TP-TX/FX-SM1310/PLUS-SC	30 km
855-19726	IE-MiniMc, TP-TX/FX-SM1310/LONG-ST	80 km
855-19727	IE-MiniMc, TP-TX/FX-SM1310/LONG-SC	80 km
IE-MiniMc 10/100 Single-Strand Fiber **		
855-19750	IE-MiniMc, TP-TX/SSFx-MM1310-SC	2 km
855-19751	IE-MiniMc, TP-TX/SSFx-MM1550-SC	2 km
855-19752	IE-MiniMc, TP-TX/SSFx-SM1310-SC	20 km
855-19753	IE-MiniMc, TP-TX/SSFx-SM1550-SC	20 km
855-19754	IE-MiniMc, TP-TX/SSFx-SM1310/PLUS-SC	40 km
855-19755	IE-MiniMc, TP-TX/SSFx-SM1550/PLUS-SC	40 km
855-19756	IE-MiniMc, TP-TX/SSFx-SM1310/LONG-SC	60 km
855-19757	IE-MiniMc, TP-TX/SSFx-SM1550/LONG-SC	60 km

PART NUMBER	DESCRIPTION	DISTANCE
IE-Giga-MiniMc 10/100/1000 *		
856-18830	IE-Giga-MiniMc, TX/SX-MM850-SC	550 m
856-18831	IE-Giga-MiniMc, TX/LX-SM1310-SC	15 km
856-18832	IE-Giga-MiniMc, TX/LX-SM1310/PLUS-SC	30 km
856-18833	IE-Giga-MiniMc, TX/LX-SM1550/LONG-SC	80 km
856-18834	IE-Giga-MiniMc, TX/LX-SM1550/XLONG-SC	100 km
IE-Giga-MiniMc 10/100/1000 Single-Strand Fiber ***		
856-18825	IE-Giga-MiniMc, TX/SSBX-SM1310-SC (1490 rcv)	10 km
856-18826	IE-Giga-MiniMc, TX/SSBX-SM1490-SC (1310 rcv)	10 km
856-18827	IE-Giga-MiniMc, TX/SSBX-SM1310/PLUS-SC (1490 rcv)	30 km
856-18828	IE-Giga-MiniMc, TX/SSBX-SM1490/PLUS-SC (1310 rcv)	30 km
856-18835	IE-Giga-MiniMc, TX/SSLX-SM1310-SC (1550 rcv)	15 km
856-18836	IE-Giga-MiniMc, TX/SSLX-SM1550-SC (1310 rcv)	15 km
856-18837	IE-Giga-MiniMc, TX/SSLX-SM1310/PLUS-SC (1550 rcv)	40 km
856-18838	IE-Giga-MiniMc, TX/SSLX-SM1550/PLUS-SC (1310 rcv)	40 km
856-18839	IE-Giga-MiniMc, TX/SSLX-SM1490/LONG-SC (1550 rcv)	60 km
856-18840	IE-Giga-MiniMc, TX/SSLX-SM1550/LONG-SC (1310 rcv)	60 km
856-18841	IE-Giga-MiniMc, TX/SSLX-SM1550/XLONG-SC (1550 rcv)	70 km

* Modular versions without AC adapter, change the two Part Numbers after the 8 to 54.
(i.e. 855-19724 becomes 854-19724)

** These products have single-strand fiber technology. Deploy in pairs, or connect to another compatible IMC Networks single-strand fiber product.
For more information go to: www.imcnetworks.com/products/SSFx.cfm

PART NUMBER	DESCRIPTION
IE-PowerTray/18	
850-13086	IE-PowerTray/18-AC (1.5U high, Rack Mountable Enclosure)
IE-MiniMc Accessories	
806-39623	AC Power Adapter for MiniMc products (10 watt, 0° C to +50° C)
806-00322-00	USA Power Adapter Clip
806-00322-01	UK Power Adapter Clip
806-00322-02	Europe Power Adapter Clip
806-00322-03	Australia/NZ Power Adapter Clip



IMC Networks

Headquarters
19772 Pauling
Foothill Ranch, CA 92610
TEL: 949-465-3000
FAX: 949-465-3020
sales@imcnetworks.com
www.imcnetworks.com

IMC Networks

Europe
Herseltsesteenweg 268
B-3200 Aarschot | Belgium
TEL: +32-16-550880
FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks

Eastern US/Latin America
28050 U.S. Hwy. 19 North, Suite 306
Clearwater, FL 33761
TEL: 727-797-0300
FAX: 727-797-0331
latinsales@imcnetworks.com

IMC Networks

Fiber Consulting Services
For information call:
TEL: 949-465-3000
1-800-624-1070 (US/CAN)
+32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2009 IMC Networks. All rights reserved. The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.