

# DROP

INSULATE  
SEAL  
PROTECT

3:1  
SHRINK RATIO



## DROP TUBING

THIN WALL HEAT SHRINK TUBING PROVIDES EXCELLENT ENVIRONMENTAL PROTECTION AND INSULATION FOR CATV DROP CONNECTORS

### FEATURES AND BENEFITS

- Shrink ratio: 3:1
- Meltable inner liner encapsulates cable and connection completely
- Excellent UV and ozone resistance
- Resistant to all fluids and solvents
- Accommodates all F-Connectors and cables
- Flexible
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C


### TYPICAL APPLICATIONS

- Sealing of coaxial drop connectors



## DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED						LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W		MELTABLE WALL THICKNESS (NOM.)			
	MM	IN	MM	IN	MM	IN	MM	IN	M	IN
0500	12.7	0.50	5.0	0.19	1.4	0.05	0.9	0.03	1.2	48
0750	19.1	0.75	8.0	0.31	1.7	0.06	1.0	0.04	1.2	48

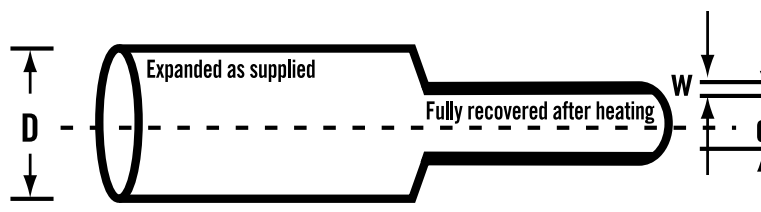

## ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Options:
  - Colour: Black (BK), Blue (BL)
- Order Example: DROP Tubing, 0500, black, unprinted

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.