

**Materials and Construction:**

Constructed of C36000 Brass Alloy.

Exterior Body is nickel plated

Electrical contact area is tin plated

EPDM O-Ring

**Product Features and Benefits**



- C36000 brass alloy components for superior mechanical strength.
- Nickel plated exterior for superior corrosion resistance.
- O-ring between internal components to stop water migration.
- Both front and rear interfaces designed to accept sealing ring G-SR-1/2.
- Design prevents water migration into the terminator even when rear port is left exposed to the environment.
- Compatible with existing tools, both G-GTT type and NS-6270.
- Unique weatherproof design. (Patent pending)



Figure 1: G-GTT-4



Figure 2: NS-6270-1

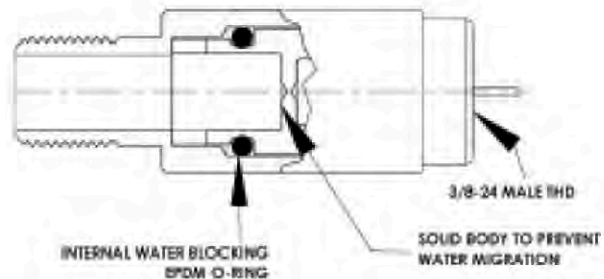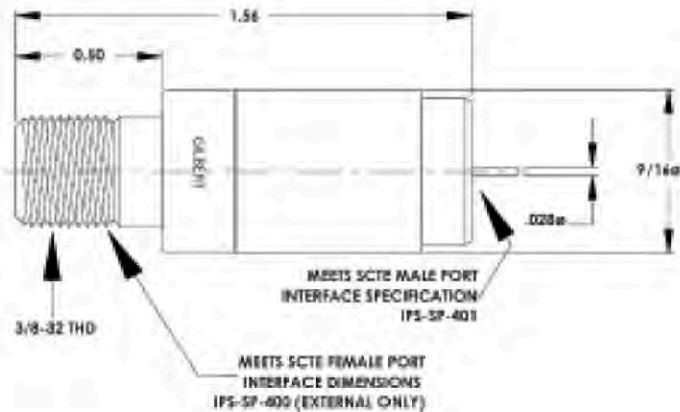

**Ordering Information**

Part Number	Package Qty	Description	Tooling
GTP-TRM	25 pcs	With Resistor	G-GTT-4, G-GTT-7, or NS-6270-1, NS-6270-3
GTP-TRM-LR	25 pcs	Without Resistor	G-GTT-4, G-GTT-7, or NS-6270-1, NS-6270-3

Corning Gilbert Inc.  
Broadband Products

5310 W. Camelback Rd.  
Glendale, AZ 85301 U.S.A.

phone: 800 528 5567 (U.S. and Canada)  
(01) 623 245 1050 (International)

fax: 800 344 6358  
(01) 623 931 0684

website: [www.corning.com/corninggilbert](http://www.corning.com/corninggilbert)  
e-mail: [info-gilbert@corning.com](mailto:info-gilbert@corning.com)