

GTR-KS-M-T

Housing Terminator Product Information



CORNING
Discovering Beyond Imagination

Broadband
Products

Connector Specifications

Frequency:

To 1 GHz

Impedance:

75 ohm nominal

VAC Rating:

300

This Housing Terminator is 75 ohms and terminates both 60 cycle AC and RF signals. Specifically designed with a one piece body, using compatible base materials. This design contains no ferro-magnetic metals which have been known to cause common path distortion.

Designed for superior return loss response and elimination of dissimilar metal junctions. The components are environmentally sealed in a one-piece tin-plated brass body to provide years of trouble-free performance, even in the most severe environments.



Materials and Construction of Connector Components:

C36000 Brass alloy

Contact pin is brass with bright acid tin plating providing excellent RF conductivity.


O-rings are ultraviolet and ozone resistant EPDM for maximum durability.

Product Features and Benefits

- Body: Brass Alloy C 36000
- Finish: Bright Acid Tin Plating
- Frequency: To 1 GHZ
- One piece body design to eliminate possible ingress/egress of RF
- Blocks AC Power and terminates RF signals in 75 ohm characteristic impedance
- Solderless construction
- Impedance 75 ohm nominal
- 300 VAC Rating

Ordering Information

Part Number
GTR-KS-M-T

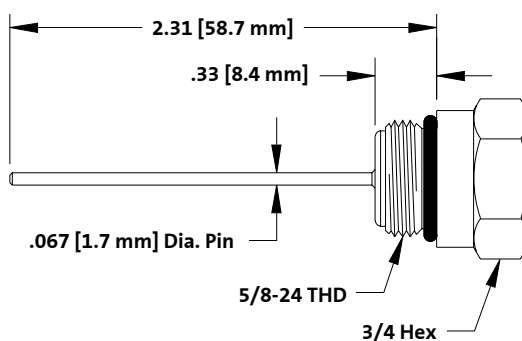

Corning Gilbert Inc.
Broadband Products

5310 W. Camelback Rd.
Glendale, AZ 85301 U.S.A.

phone: 800 528 5567 (U.S. and Canada)
(01) 623 245 1050 (International)

fax: 800 344 6358
623 931 0684
(01) 623 939 3538

website: www.corning.com/corninggilbert
e-mail: info-gilbert@corning.com