

Fixed Wall Mount Cabinets



Description

Vericom Fixed Wall Mount Cabinets are a perfect solution for a variety of networking, AV, and security installations. Compatible with all standard 19-inch EIA equipment, these cabinets are packed with features that make setting up and maintaining equipment a breeze, including a lockable, removable, and reversible front door, removable side panels, and a removable 12" x 12" rear panel for in-wall cable entry.

Constructed of cold rolled and powder-coated 19-gauge steel, these fixed wall mount cabinets have a maximum load capacity of 132 lbs and are available in 9U, 12U, and 15U configurations. Ships unassembled and flat packed for easy on-site handling.

Benefits

Security & Protection

- Locking door and side panels prevent unauthorized access to equipment
- · Door and side panels are grounded to the cabinet frame

Flexibility

- Multiple cable entry options provide greater flexibility during installation
- Mounting rails are adjustable to match a variety of equipment sizes
- Front door and side panels are all removable for convenient access to equipment

High Capacity

- Available in three sizes to fit in a variety of environments where space is limited
- · Top and bottom panel vents to optimize cooling of equipment
- Adaptable for use in network, security and audio/visual installations

Key Features


- · Cable entry on top, bottom and back
- · Lace points to reduce cable clutter
- · Lockable acrylic front door is removable and reversible
- · Removable back panel and side panels

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210302.6



Fixed Wall Mount Cabinets

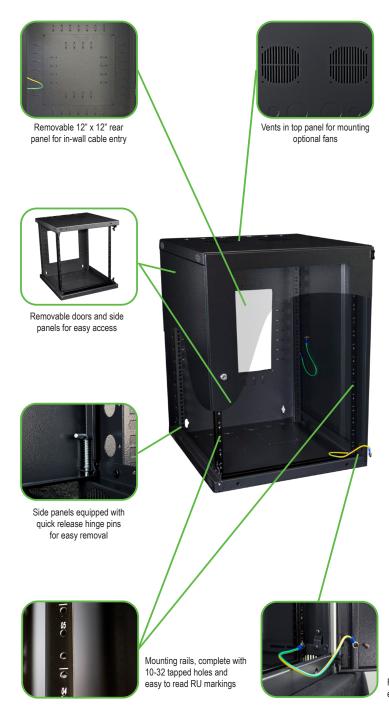

Product Specifications

Product Type: Fixed Wall Mount Cabinet

Frame Material: Heavy Gauge Cold Rolled Steel

Finish: Black Powder Coat

Dimensions (HxWxD): (Height Varies By Item #) x 21.25" x 23.62"

Rack Unit Quantity: 9U, 12U or 15U

Front Door: Removable, Reversible & Lockable Steel Frame With Full Panel Acrylic Window, Opens Full 180°

Rear Panel: 12" x 12" Removable Panel, Wall Mounting Keyholes Spaced 16" Apart, Multiple Lace Points

Side Panels: Solid, Full Height & Removable

Top Panel: Ventilation Holes For Optional Fan Unit, (6) Knock-Out Cable Entry Holes Located at Back: (2) ¾", (2) 1" and (2) 2" Knock-Outs

Bottom Panel: Ventilation Holes For Optional Fan Unit, (6) Knock-Out Cable Entry Holes Located at Back: (2) ³/₄", (2) 1" and (2) 2" Knock-Outs

Equipment Support: Adjustable Rail Depth (3.25"), 1.75" RU Spacing, Marked & Numbered On Rails; 19" W, EIA-310-D Universal Vertical Hole Spacing, 10-32 Threaded Holes

Grounding: 14 AWG Ground Wire Connects Doors & Side Panels To Cabinet Frame

Static Loading Capacity: 132 lbs.

Included Accessories: (48) 10-32 Mounting Screws & Washers, (1) Grounding Kit, (1) Paper Mounting Template, (2) Keys

Optional Accessories: RAMS5D1 (Horizontal D-Ring Cable Manager - 5 Rings, Steel, 1U), RAMPFD1 (Horizontal Finger Duct Cable Manager- Plastic, RASC122 (12" Cantilever Shelf, 2U), RASA231 (Adjustable Depth Wall Cabinet Shelf, 1U), RARGKWC (Rubber Grommet Kit for Fixed or Double Hinge Wall Mount Cabinets), RAFND02 (Double Fan, 150 CFM)

Compliance & Standards: ANSI/EIA RS-310D, IEC60297-2, DIN41194; Part 1, DIN41494; Part 7

Front door and side panels equipped with ground wire

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210302.6

© 2021 Vericom Global Solutions info@vericomsolutions.com • vericomsolutions.com










Fixed Wall Mount Cabinets


Ordering Information

Item SKU's	Rack Units	Height	Width	Depth
VW3-6091	9	18.11"	21.26"	23.57"
VW3-6121	12	23.35"	21.26"	23.57"
VW3-6151	15	28.60"	21.26"	23.57"

Technical Drawing





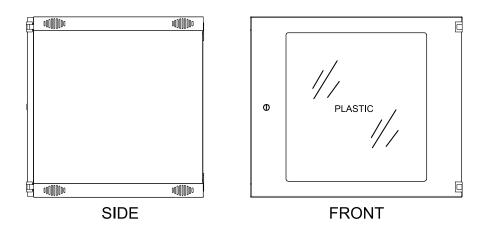

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20210302.6