

When simple, individual, copper-to-fiber or copper-to-coax conversions are required, along with advanced troubleshooting features, installing McBasic Series standalone media converters is the perfect, cost-effective solution.

Features and Benefits

Perfect for a variety of applications

- Has a small, rugged design offering many advanced features

Meets a multitude of installation requirements

- Available in 10 Mbps, 100 Mbps, 1000 Mbps, and Auto-Sensing 10/100 versions
- Available for multi-mode or single-mode fiber
- Also available for single-strand fiber
- Available with ST or SC connectors

Converts 10 Mbps twisted pair to fiber today, and 100 Mbps twisted pair to fiber tomorrow

- McBasic 10/100 provides transparent end-to-end 10/100 Auto Negotiation for easy upgrade; no user intervention or visits to remote locations required

Eases troubleshooting

- LinkLoss, FiberAlert, Transparency and Link Fault Detection features, along with LEDs, assist in diagnosing problems on fiber optic networks

McBasic 10 Mbps Converters:

- Convert 10 Mbps twisted pair to 10 Mbps fiber
- Convert 10 Mbps twisted pair to 10 Mbps thin coax

McBasic 100 Mbps Converters:

- Convert 100 Mbps twisted pair to 100 Mbps fiber

McBasic 10/100, Auto-Sensing

Dual-Speed Converters:

- Convert 10 Mbps twisted pair to 10 Mbps fiber OR convert 100 Mbps twisted pair to 100 Mbps fiber

McBasic-Gigabit 1000 Mbps Converters:

- Convert 1000 Mbps twisted pair to 1000 Mbps fiber
- Features Link Fault Pass-Through (LFPT), a troubleshooting feature that monitors the copper and fiber ports of the unit; if a port loses LINK, the unit disables the transmitting signal on the other port (Pass-Through) and notifies the user via LED




The McBasic's small, table-top design and durability make it perfect for installation anywhere space is limited. Additionally, the McBasic comes with an internal AC power supply. This feature significantly increases reliability over products that use bulky, external AC/DC power transformers. The McBasic series includes:

The McBasic includes troubleshooting features such as LinkLoss, FiberAlert, Transparency and Link Fault Detection that make isolating fiber breaks easier should they occur. The McBasic also features either AutoCross or switch crossover/pass-through switch on twisted pair connections, termination switch on BNC ports, and diagnostic LEDs. Most McBasic units are available with single-strand fiber which can effectively double the capacity of fiber by allowing two individual channels to share one strand of fiber; Full-Duplex data travels on different wavelengths — 1310 nm and 1550 nm, for example.

Auto-Sensing 10/100 Mbps McBasic converters offer significant advantages over regular 10 and 100 Mbps converters. An ideal choice for both enterprise and service provider networks, 10/100 converters save time and money when deployed at the host and remote site. Enterprise networks planning a migration path from 10 Mbps to 100 Mbps often deploy Auto-Sensing converters, then upgrade when ready and units will automatically adapt to increased speed. Service providers with 10 or 100 Mbps links to customer premises can sell customers more bandwidth without upgrading the converters at the POP and the customer network edge.

Application Example

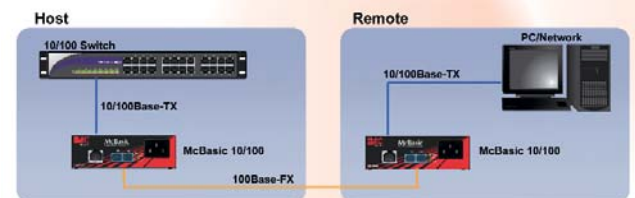

Technical Specifications

McBasic TP/BNC 10 Mbps

- IEEE 802.3 10Base-T twisted pair
- IEEE 802.3 10Base-2 coax

McBasic 10 Mbps

- IEEE 802.3 10Base-T twisted pair and 10Base-FL fiber
- Features LinkLoss and Pulsing FiberAlert

McBasic 100 Mbps

- IEEE 802.3u 100Base-TX twisted pair and 100Base-FX or -SX fiber
- Features LinkLoss and FiberAlert
- Features Auto Negotiation

McBasic 10/100

- IEEE 802.3 10Base-T twisted pair and 10Base-FL fiber
- IEEE 802.3u 100Base-TX twisted pair and 100Base-FX or -SX fiber
- Features Link Fault Detection and Transparency
- Features Auto Negotiation

McBasic-Gigabit

- IEEE 802.3ab 1000Base-T twisted pair
- IEEE 802.3z 1000Base-LX or SX fiber
- Features Link Fault Pass-Through (LFPT) and FiberAlert

All McBasic Series

- Include MDI-II/MDI-X switch
- Includes fixed, internal AC power
- 50/125µm or 62.5/125µm multi-mode fiber
- 9/125µm single-mode fiber
- Includes diagnostic LEDs

McBasic 10, 100 ,10/100 Dimensions

1.64"H x 4.75"W x 4.54"D
(4.2 cm x 12.17 cm x 11.64 cm)

McBasic Gigabit Dimensions:

1.64"H x 4.75"W x 7.3"D
(4.2 cm x 12.17 cm x 18.71 cm)

Connectors:

- RJ-45 and BNC or ST, SC (McBasic Gigabit SC only)
- Supports Half- and Full-Duplex operation

Regulatory Approvals:

- FCC Class A
- UL/cUL, CSA, CE

Operating Temperature:

+32° to +122°F (0° to +50°C)

Storage Temperature:

0° to +160°F (-20° to +70°C)

Humidity:

5% – 95% (non-condensing)

Shipping Weight:

1.7 lbs (0.77 kg) - McBasic-Gigabit
1.3 lbs (0.58 kg) All others

Power Rating:

100-240V AC, 50/60Hz, 1.0A

Fiber Optics Specifications

For each product listed below in the Ordering Information section, the DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

PART #	DESCRIPTION	DIST	PART #	DESCRIPTION	DIST	PART #	DESCRIPTION	DIST
McBasic 10 Mbps			McBasic 100 Mbps			McBasic Gigabit 1000 Mbps		
855-10230	TP/FO-MM850-ST	2 km	855-10929	TX/SX-MM850-ST	2 km	855-11913	TX/SX-MM850-SC	550 m
855-10231	TP/FO-MM850-SC	2 km	855-10930	TX/SX-MM850-SC	2 km	855-11914	TX/LX-SM1310/-SC	15 km
855-10232	TP/FO-MM1300-ST	2 km	855-10927	TX/FX-MM1300-ST	5 km	855-11915	TX/LX-SM1310/PLUS-SC	40 km
855-10233	TP/FO-MM1300-SC	2 km	855-10928	TX/FX-MM1300-SC	5 km	855-11917	TX/LX-SM1550/LONG-SC	80 km
855-10234	TP/FO-SM1310/PLUS-ST	40 km	855-10931	TX/FX-SM1310/PLUS-ST	40 km	855-11918	TX/LX-SM1550/XLONG-SC	100 km
855-10235	TP/FO-SM1310/PLUS-SC	40 km	855-10932	TX/FX-SM1310/PLUS-SC	40 km	McBasic 1000 Mbps Gigabit Single-Strand Fiber *		
855-10237	TP/FO-SM1310/LONG-ST	70 km	855-10933	TX/FX-SM1310/LONG-ST	80 km	855-11844	TX/SSLX-SM1310-SC (1550rcv)	15 km
855-10238	TP/FO-SM1310/LONG-SC	70 km	855-10934	TX/FX-SM1310/LONG-SC	80 km	855-11845	TX/SSLX-SM1550-SC (1310rcv)	15 km
855-10240	TP/FO-SM1550/LONG-SC	80 km	855-10937	TX/FX-SM1550/LONG-SC	80 km	855-11824	TX/SSBX-SM1310-SC (1490rcv)	10 km
851-10124	TP/BNC	300 m	McBasic 100 Mbps Single-Strand Fiber *			855-11825	TX/SSBX-SM1490-SC (1310rcv)	10 km
McBasic 10/100 Mbps			855-10949	TX/SSFx-MM1310-SC (1550rcv)	2 km	855-11826	TX/SSBX-SM1310/PLUS-SC (1490rcv)	30 km
855-10260	10/100-MM850-ST	2 km	855-10950	TX/SSFx-MM1550-SC (1310rcv)	2 km	855-11827	TX/SSBX-SM1490/PLUS-SC (1310rcv)	30 km
855-10261	10/100-MM850-SC	2 km	855-10951	TX/SSFx-SM1310-SC (1550rcv)	20 km	855-11846	TX/SSLX-SM1310/PLUS-SC (1550rcv)	40 km
855-10262	10/100-MM1300-ST	2 km	855-10952	TX/SSFx-SM1550-SC (1310rcv)	20 km	855-11847	TX/SSLX-SM1550/PLUS-SC (1310rcv)	40 km
855-10263	10/100-MM1300-SC	2 km	855-10953	TX/SSFx-SM1310/PLUS-SC (1550rcv)	40 km	855-11850	TX/SSLX-SM1310/LONG-SC (1550rcv)	60 km
855-10267	10/100-SM1310/PLUS-ST	40 km	855-10954	TX/SSFx-SM1550/PLUS-SC (1310rcv)	40 km	855-11851	TX/SSLX-SM1550/LONG-SC (1310rcv)	60 km
855-10268	10/100-SM1310/PLUS-SC	40 km	855-10955	TX/SSFx-SM1310/LONG-SC (1550rcv)	60 km	855-11852	TX/SSLX-SM1490/XLONG-SC (1550rcv)	70 km
855-10269	10/100-SM1310/LONG-ST	80 km	855-10957	TX/SSFx-SM1550/LONG-SC (1310rcv)	60 km	855-11853	TX/SSLX-SM1550/XLONG-SC (1490rcv)	70 km
855-10270	10/100-SM1310/LONG-SC	80 km	*These products have single-strand fiber technology. Deploy in pairs, or connect to another compatible IMC Networks single-strand fiber product.					
855-10274	10/100-SM1550/LONG-SC	80 km	For more information go to: www.imcnetworks.com/products/SSFx					

PART #	DESCRIPTION
Rackmount/Wallmount Accessories	
895-39226	McBasic, MediaChassis, AccessEtherLinX Rackmount Brackets
895-39227	McBasic, MediaChassis, AccessEtherLinX Wallmount Brackets
895-39228	McBasic, MediaChassis, AccessEtherLinX x3 Rackmount Shelf
895-39949	McBasic, iMediaChassis/3, MediaChassis, AccessEtherLinX Rackmount Shelf



IMC Networks
Headquarters
19772 Pauling
Foothill Ranch, CA 92610
TEL: 949-465-3000
FAX: 949-465-3020
sales@imcnetworks.com
www.imcnetworks.com

IMC Networks
Europe
Herseltsesteenweg 268
B-3200 Aarschot | Belgium
TEL: +32-16-550880
FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks
Eastern US/Latin America
28050 U.S. Hwy. 19 North, Suite 306
Clearwater, FL 33761
TEL: 727-797-0300
FAX: 727-797-0331
latinsales@imcnetworks.com

IMC Networks
Fiber Consulting Services
For information call:
TEL: 949-465-3000
1-800-624-1070 (US/CAN)
+32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2009 IMC Networks. All rights reserved. The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.